


ADAPTOR WELDON TYPE

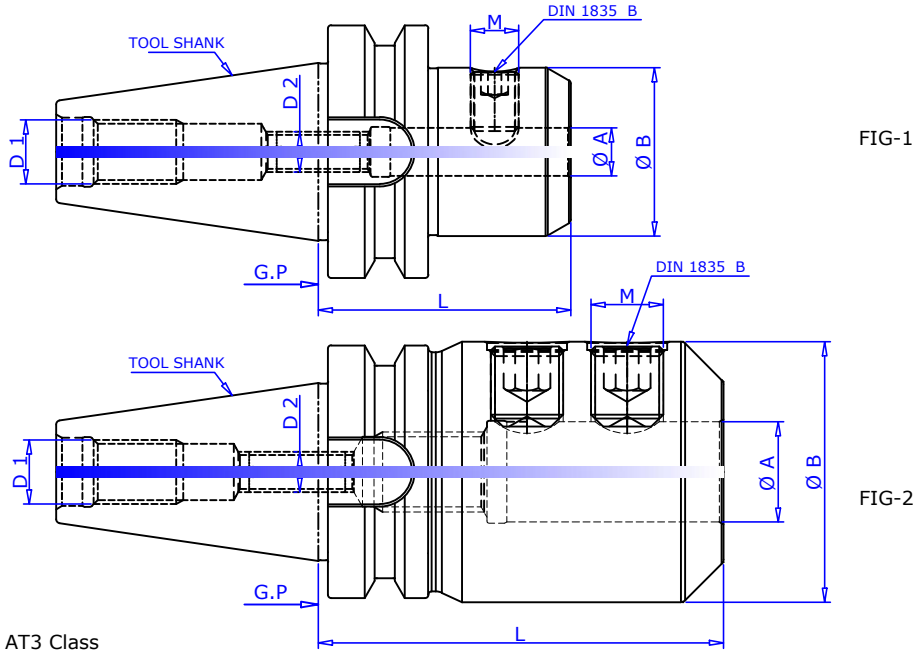

Taper Angle AT3 Class

Maximum runout of MOUNTING taper to INTERNAL dia 0.005mm

Balancing GRADE:- G6.3 /12,000 rev./min STD.

Fine Balancing of Tool Holder:- SPECIFY CLASS (AT EXTRA COST)

Designation	Tool Shank	Ø A H5	L	Ø B	M	D1	D2	FIG
BT 30 WN 06 045 G.P	BT 30	6	45	25	M6	M12	M5	1
BT 30 WN 08 045 G.P	BT 30	8	45	28	M8	M12	M6	1
BT 30 WN 10 050 G.P	BT 30	10	50	35	M10	M12	M8	1
BT 30 WN 12 050 G.P	BT 30	12	50	42	M12	M12	M10	1
BT 30 WN 16 063 G.P	BT 30	16	63	48	M14	M12	M12	1
BT 30 WN 20 063 G.P	BT 30	20	63	52	M16	M12	M16	1
BT 40 WN 06 050 G.P	BT 40	6	50	25	M6	M16	M5	1
BT 40 WN 08 050 G.P	BT 40	8	50	28	M8	M16	M6	1
BT 40 WN 10 063 G.P	BT 40	10	63	35	M10	M16	M8	1
BT 40 WN 12 063 G.P	BT 40	12	63	42	M12	M16	M10	1
BT 40 WN 16 063 G.P	BT 40	16	63	48	M14	M16	M12	1
BT 40 WN 20 063 G.P	BT 40	20	63	52	M16	M16	M16	1
BT 40 WN 25 090 G.P	BT 40	25	90	65	M18 X 2	M16	M20	2
BT 40 WN 32 100 G.P	BT 40	32	100	72	M20 X 2	M16	M20	2
BT 40 WN 40 100 G.P	BT 40	40	100	80	M20 X 2	M16	M20	2
BT 50 WN 06 063 G.P	BT 50	6	63	25	M6	M24	M5	1
BT 50 WN 08 063 G.P	BT 50	8	63	28	M8	M24	M6	1
BT 50 WN 10 080 G.P	BT 50	10	80	35	M10	M24	M8	1
BT 50 WN 12 080 G.P	BT 50	12	80	42	M12	M24	M10	1
BT 50 WN 16 080 G.P	BT 50	16	80	48	M14	M24	M12	1
BT 50 WN 20 080 G.P	BT 50	20	80	52	M16	M24	M12	1
BT 50 WN 25 100 G.P	BT 50	25	100	65	M18 X 2	M24	M20	2
BT 50 WN 32 105 G.P	BT 50	32	105	72	M20 X 2	M24	M20	2
BT 50 WN 40 115 G.P	BT 50	40	115	80	M20 X 2	M24	M20	2
BT 50 WN 50 125 G.P	BT 50	50	125	100	M24 X 2	M24	M20	2

Ordering Example :- BT40 WN25 090G.P - 2 Nos.

All Details are subject to change without notice.