


HSK TOOL SHANK.

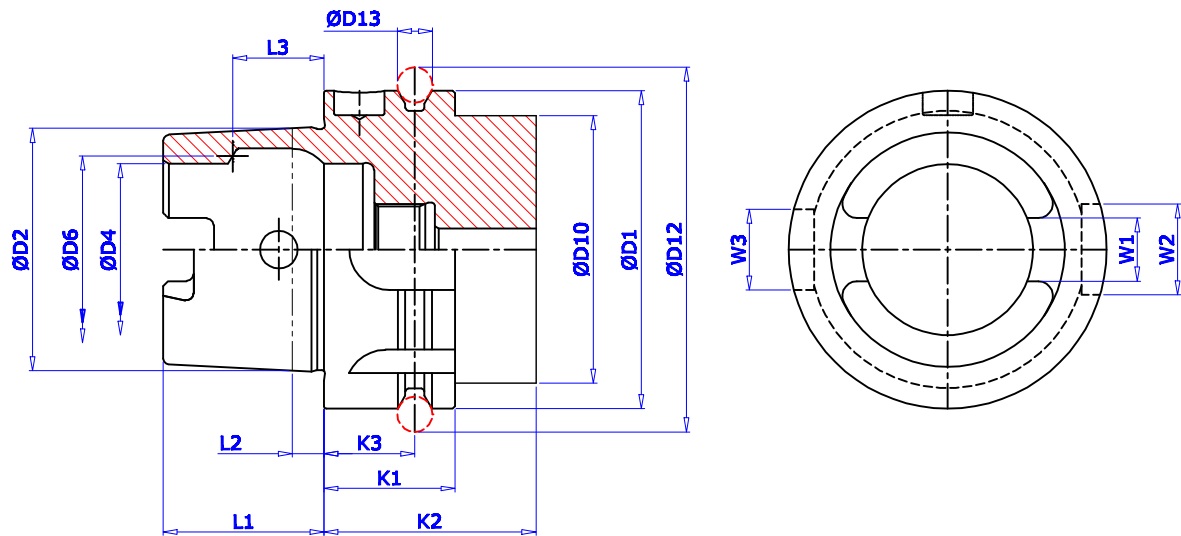

	HSK-A 50	HSK-A 63	HSK-A 100
W1	10.54	12.5	20.02
W2	12	16	20
W3	14	18	22
ØD1	50	63	100
ØD2	38	48	75
ØD4	26	34	53
ØD6	29	37	58
ØD10	42	53	88
ØD12	59.3	72.3	109.75
ØD13	7	7	7
K1	26	26	29
K2	42	42	45
K3	18	18	20
L1	25	32	50
L2	5	6.3	10
L3	14.13	118.13	28.56

All HSK Tool holders are Manufactured according to Din 69893-1 FORM A
Balanced to G6.3-15,000 RPM.

Used on machining centers milling machines turning machines, special machines with automatic tool change.

- Central axial coolant supply through coolant tube.
- Torque transmission via two key slots at end of taper.
- Two slots on collar for tool magazine location edge.
- Hole for data carrier DIN69873 in collar.