


## FACE MILL HOLDERS DIN6357 (FMH)

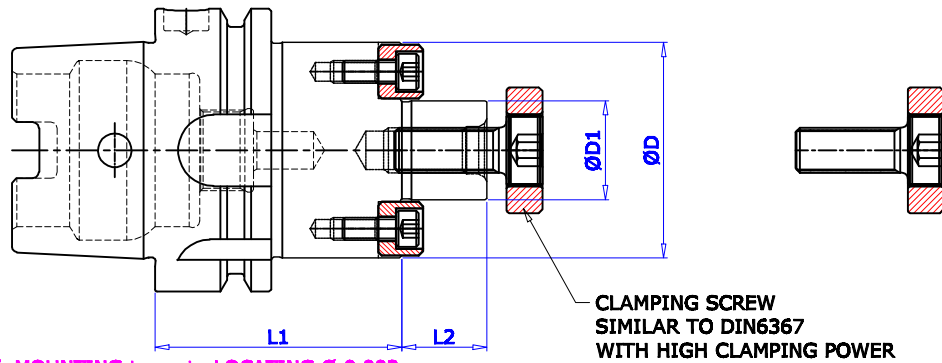

Maximum runout of MOUNTING taper to LOCATING  $\varnothing$  0.003mm


**Balancing GRADE:- G6.3 /15,000 rev./min STD.**

**Fine Balancing of Tool Holder:- 2.5 G AT 25000 RPM (AT EXTRA COST)**


HSK FMH	$\varnothing$ D1	L1	$\varnothing$ D	L2
HSK-A50 FMH16 045 G.P	16	45	38	17
HSK-A50 FMH22 055 G.P	22	55	48	19
HSK-A50 FMH27 055 G.P	27	55	58	21
HSK-A50 FMH32 060 G.P	32	60	78	24
HSK-A63 FMH16 045 G.P	16	45	38	17
HSK-A63 FMH16 100 G.P	16	100	38	17
HSK-A63 FMH16 160 G.P	16	160	38	17
HSK-A63 FMH22 050 G.P	22	50	48	19
HSK-A63 FMH22 100 G.P	22	100	48	19
HSK-A63 FMH22 160 G.P	22	160	48	19
HSK-A63 FMH27 055 G.P	27	55	58	21
HSK-A63 FMH27 100 G.P	27	100	58	21
HSK-A63 FMH27 160 G.P	27	160	58	21
HSK-A63 FMH32 060 G.P	32	60	78	24
HSK-A63 FMH32 100 G.P	32	100	78	24
HSK-A63 FMH32 160 G.P	32	160	78	24
HSK-A63 FMH40 065 G.P	40	65	88	27
HSK-A63 FMH40 100 G.P	40	100	88	27
HSK-A63 FMH40 160 G.P	40	160	88	27
HSK-A100 FMH16 055 G.P	16	55	38	17
HSK-A100 FMH22 055 G.P	22	55	48	19
HSK-A100 FMH27 055 G.P	27	55	58	21
HSK-A100 FMH32 060 G.P	32	60	78	24
HSK-A100 FMH40 065 G.P	40	65	88	27



TENON



ALLEN CAP  
SCREW



SCREW

D	SCREW	TENON	ALLEN CAP SCREW
16	SCR16 X M8	8	M4
22	SCR22 X M10	10	M5
27	SCR27 X M12	12	M5
32	SCR32 X M16	14	M6
40	SCR40 X M20	16	M6

Ordering Example :- HSK-A 63 FMH16 045G.P -2 Nos

All Details are subject to change without notice.