


FACE MILL HOLDER TENON DRIVER (THROUGH COOLANT) DIN 6357 (FMH-K)
 FACE MILL HOLDER TENNON DRIVER + DIN 2079* (FMH)

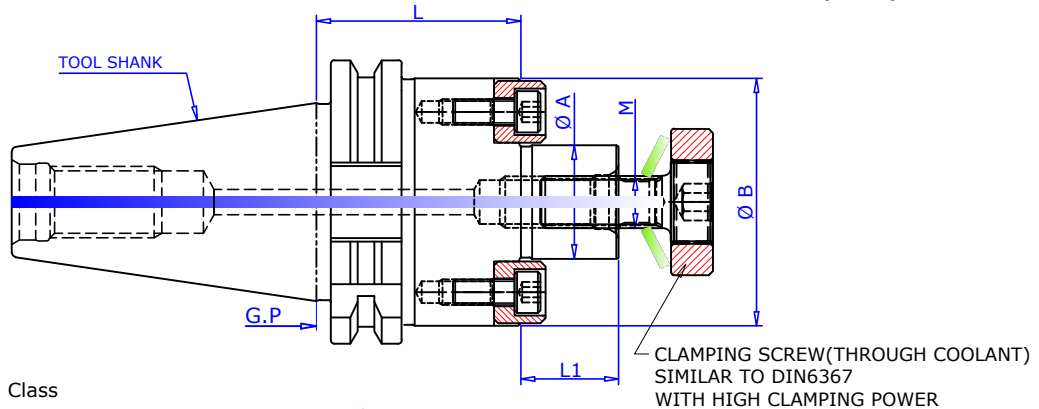

Taper Angle AT3 Class

Maximum runout of MOUNTING taper to LOCATING \varnothing 0.005mm

Balancing GRADE:- G6.3 /12,000 rev./min STD.

Fine Balancing of Tool Holder:- SPECIFY CLASS (AT EXTRA COST)

Designation	Tool Shank	\varnothing A h6	L	L1	\varnothing B	M	TENON
SK 30 FMH-K 16 040 G.P	SK 30	16	40	17	38	M8	8
SK 30 FMH-K 22 040 G.P	SK 30	22	40	19	48	M10	10
SK 30 FM-K 27 040 G.P	SK 30	27	40	21	58	M12	12
SK40 FMH-K 16 045 G.P	SK 40	16	45	17	38	M8	8
SK 40 FMH-K 16 100 G.P	SK 40	16	100	17	38	M8	8
SK 40 FMH-K 16 120 G.P	SK 40	16	120	17	38	M8	8
SK 40 FMH-K 16 160 G.P	SK 40	16	160	17	38	M8	8
SK 40 FMH-K 22 045 G.P	SK 40	22	45	19	48	M10	10
SK 40 FMH-K22 100 G.P	SK 40	22	100	19	48	M10	10
SK 40 FMH-K 22 120 G.P	SK 40	22	120	19	48	M10	10
SK 40 FMH-K 22 160 G.P	SK 40	22	160	19	48	M10	10
SK 40 FMH-K 27 045 G.P	SK 40	27	45	21	58	M12	12
SK 40 FMH-K 27 100 G.P	SK 40	27	100	21	58	M12	12
SK 40 FMH-K 27 120 G.P	SK 40	27	120	21	58	M12	12
SK 40 FMH-K 27 160 G.P	SK 40	27	160	21	58	M12	12
SK 40 FMH-K 32 050 G.P	SK 40	32	50	24	78	M16	14
SK 40 FMH-K 32 100 G.P	SK 40	32	100	24	78	M16	14
SK 40 FMH-K 32 120 G.P	SK 40	32	120	24	78	M16	14
SK 40 FMH-K 32 160 G.P	SK 40	32	160	24	78	M16	14
SK 40 FMH-K 40 055 G.P WITH PCD HOLE *	SK 40	40	55	27	88	M20	16
SK 40 FMH-K 40 100 G.P WITH PCD HOLE *	SK 40	40	100	27	88	M20	16
SK 40 FMH-K 40 160 G.P WITH PCD HOLE *	SK 40	40	160	27	88	M20	16
SK 50 FMH-K 16 055 G.P	SK 50	16	55	17	38	M8	8
SK 50 FMH-K 16 100 G.P	SK 50	16	100	17	38	M8	8
SK 50 FMH-K 16 160 G.P	SK 50	16	160	17	38	M8	8
SK 50 FMH-K 22 055 G.P	SK 50	22	55	19	48	M10	10
SK 50 FMH-K 22 100 G.P	SK 50	22	100	19	48	M10	10
SK 50 FMH-K 22 160 G.P	SK 50	22	160	19	48	M10	10
SK 50 FMH-K 27 055 G.P	SK 50	27	55	21	58	M12	12
SK 50 FMH-K 27 100 G.P	SK 50	27	100	21	58	M12	12
SK 50 FMH-K 27 160 G.P	SK 50	27	160	21	58	M12	12
SK 50 FMH-K 32 060 G.P	SK 50	32	60	24	78	M16	14
SK 50 FMH-K 32 100 G.P	SK 50	32	100	24	78	M16	14
SK 50 FMH-K 32 160 G.P	SK 50	32	150	24	78	M16	14
SK 50 FMH-K 40 055 G.P WITH PCD HOLE *	SK 50	40	55	27	88	M20	16
SK 50 FMH-K 40 100 G.P WITH PCD HOLE *	SK 50	40	100	27	88	M20	16
SK 50 FMH-K 40 160 G.P WITH PCD HOLE *	SK 50	40	160	27	88	M20	16
SK 50 FMH-K 60 070 G.P WITH PCD HOLE *	SK 50	60	70	40	129	M30	25

Ordering Example :- SK40 FMH-K27 045 G.P - 2 Nos.

All Details are subject to change without notice.